



European
GATE VALVES
LIMITED

*robust
accessible
lasting*

Gas Dampers

circular dampers



Designed for operation in hot gas and fume ducts.

Single circular butterfly damper using stub shafts, roller bearings, stuffing box shaft seal and actuator to customer requirements.

Diameters from 300mm to 3,000mm.

Standard or custom flange drilling

Temperatures to 900°C. Manual, Electric, Pneumatic or Hydraulic actuation. Carbon Steel, Stainless Steel or Abrasion Resistant Steel Construction

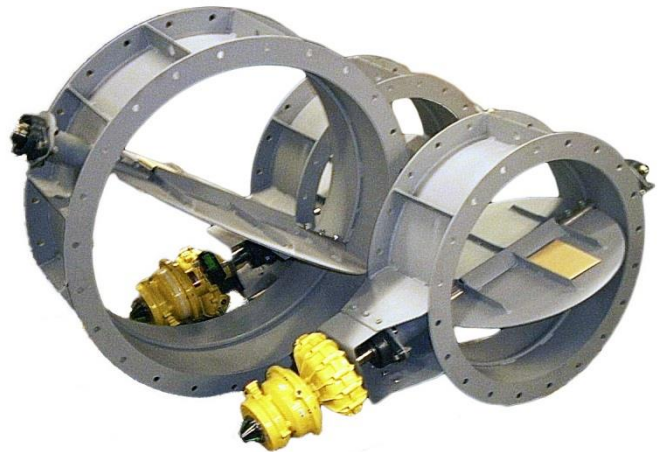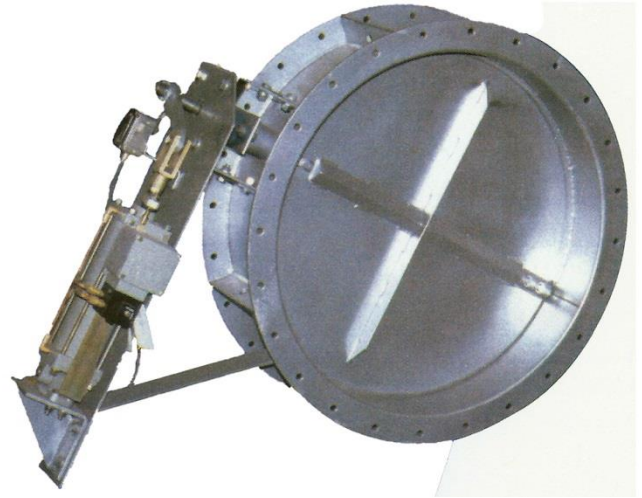


rectangular dampers

Single rectangular butterfly damper using stub shafts, roller bearings, stuffing box shaft seal and actuator to customer requirements.

Sizes from 250mm x 250mm. to 1,500mm x 1,500mm.

Standard or custom flange drilling.

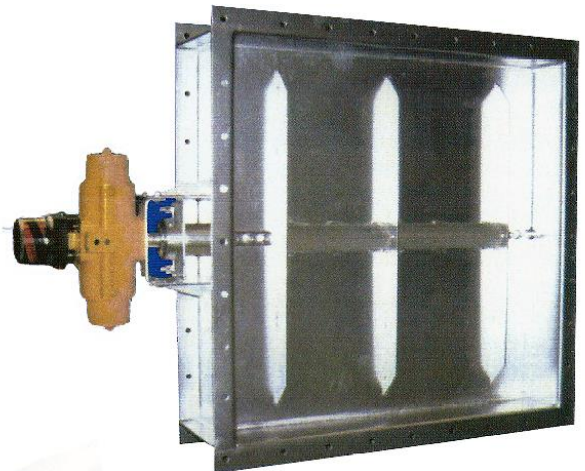

multi-louvre dampers

Fabricated body using folded sheet to form two connecting flanges.

Multi-Rectangular butterfly damper using stub shafts, roller bearings, stuffing box shaft seal and actuator to customer requirements.
Sizes up to 3,000mm. x 5,000mm to customer dimensions.

Fully tested instrumentation and electrical control packages, cabinets and switch gear can be supplied. Pneumatic and hydraulic drive systems including piping, valving and reservoirs can also be accommodated.



guillotine dampers

Designed for operation in hot gas and fume ducts.
Single rectangular blade
Blade guided by a deflector which can contain a ceramic fibre seal.

Stuffing box blade seal and actuator to customer requirements.
Sizes from 250mm x 250mm. to 2,500mm x 2,500mm.
Standard or custom flange drilling.

